


TATA LPT 2518

Performance matters



- Powerful Driveline
- Fuel efficient Cummins Engine
- Proven Aggregates
- High performance
- Power of lower total cost of ownership
- Total peace of mind

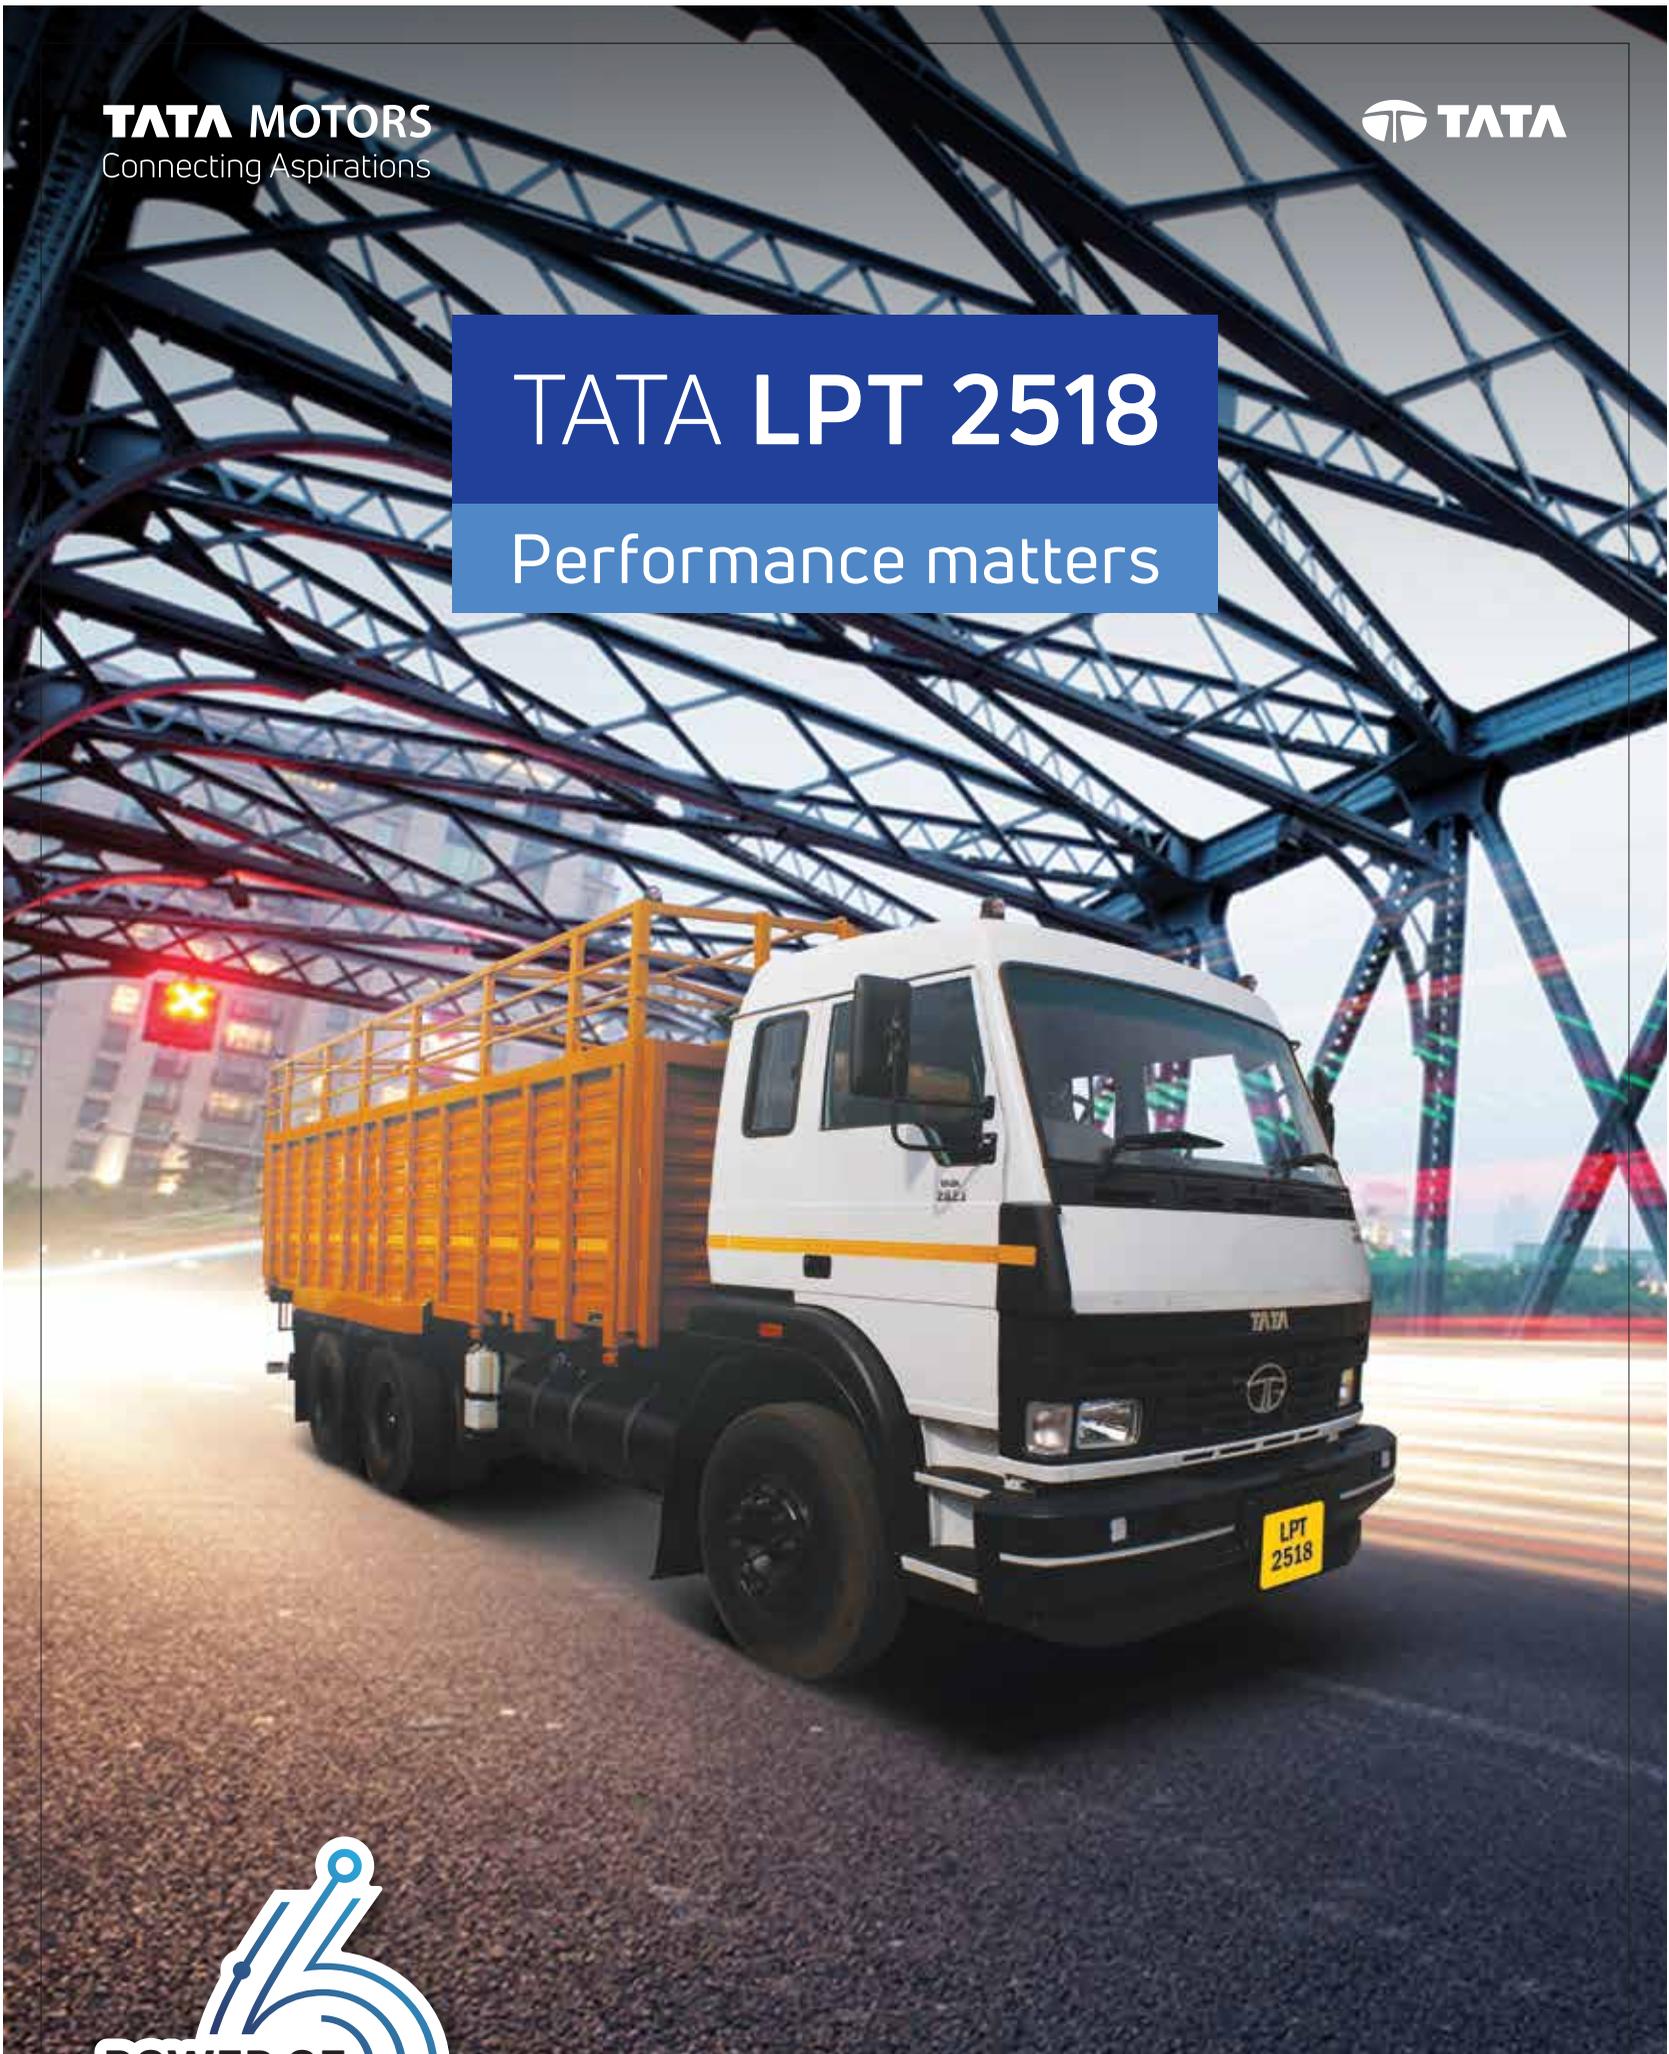

TATA LPT 2518

SPECIFICATIONS

MODEL

TATA LPT 2518 BS III 6X4

CAB

Sleeper Cabin

ENGINE

Model	CUMMINS B5.9
Capacity (cc)	5883 cc 6 Cylinder
Type	Turbocharged Inter cooled
Power hp @ r/min	183 hp @ 2500 rpm
Torque Nm @ r/min	685 Nm @ 1400 rpm

TRANSMISSION

Model	GB-750
Shift	Manual
No. of gears forward	6+1
First gear ratio	9.19
Top gear ratio	1

DRIVE AXLE

Drive	6x4
Rear Axle	RA 109 SRT
Reduction type	Single
Final ratio	6.14

CLUTCH

Type	Single
Diameter (mm)	380

BRAKES

Type	Full Air S-Cam with Automatic Adjuster
Front	Drum
Rear	Drum

SUSPENSION

Front Suspension	Semi elliptical multi leaf spring at front
Rear Suspension	Semi elliptical leaf spring

MAJOR DIMENSIONS (mm)

Overall height	2843
Overall length	9088
Overall width	2440
Front overhang	1338
Rear overhang	2155
Wheelbase	4880
Ground clearance	300

MASS (kg)

GVW (kg)	25000
Kerb Weight	7340
Without loadbody	
Permissible	19000
Rear Axle Weight	
Permissible	6000
Front axle Weight	

FUEL TANK (l)

Fuel Tank Capacity	225
--------------------	-----

TYRES

Size & Ply rating	10 R 20- 16PR
-------------------	---------------

BODY TYPE

21 Feet Deck Length HSD/FSD/CBC

For more information, please contact:

International Business - Commercial Vehicles, A Block, Shiv Sagar Estate, Dr. Annie Besant Road, Worli, Mumbai, Maharashtra - 400 018, India.
Tel.: 91 22 67577200 | Fax: 91 22 67577225 | Website: www.tatamotors.com